

SC-2 DX Autosampler

ESI introduces the SC-DX system, a durable, streamlined, integrated automation system with fully expandable hardware and software supporting inorganic and organic applications.

The SC-DX system configurations range from a basic high-performance autosampler to a complete, easy-to-use, on-line sample preparation system.

The SC-DX is a cost-effective way to make difficult analytical problems routine and routine applications more productive.

Benefits

- **Durable** – Long life components for enhanced chemical resistance
- **Productive** – Improves speed and data quality
- **Flexible Software Interface**
- **Streamlined**
- **Compact**

Dimensions and Weight


- Height: 462mm (18")
- Width: 540mm (21")
- Depth: 295mm (11.5")
- Weight: 8.2kg (18 lbs.)

Power Requirements

- 24 V DC switching power supply, 6 A (included)
- Input power: 100-240 VAC \pm 10%, 50-60 Hz

Electrical Connections

- RS-232 with USB and IEEE-488 options.
- 3 External Switches In/Out

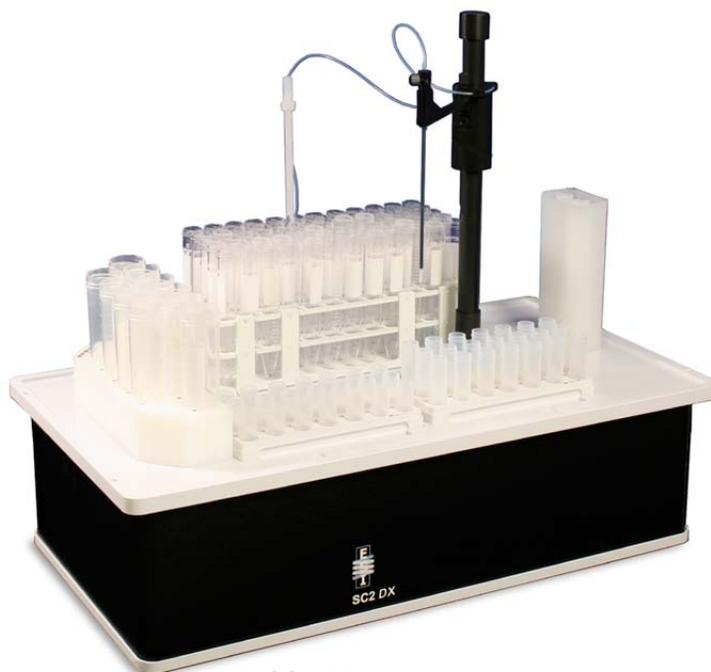

SC-2 DX Autosampler
with Dual Flowing Rinse

Configuration Options

- 2 large racks or 4 micro racks
- 0, 1, 2 or 3 high-purity injection valves
- 0, 1, or 2 MP² micro peristaltic pumps
- 0, 1, or 2 SYRIX syringe pumps